P1: M-004	
P2: M-005	

Customer No: No.6

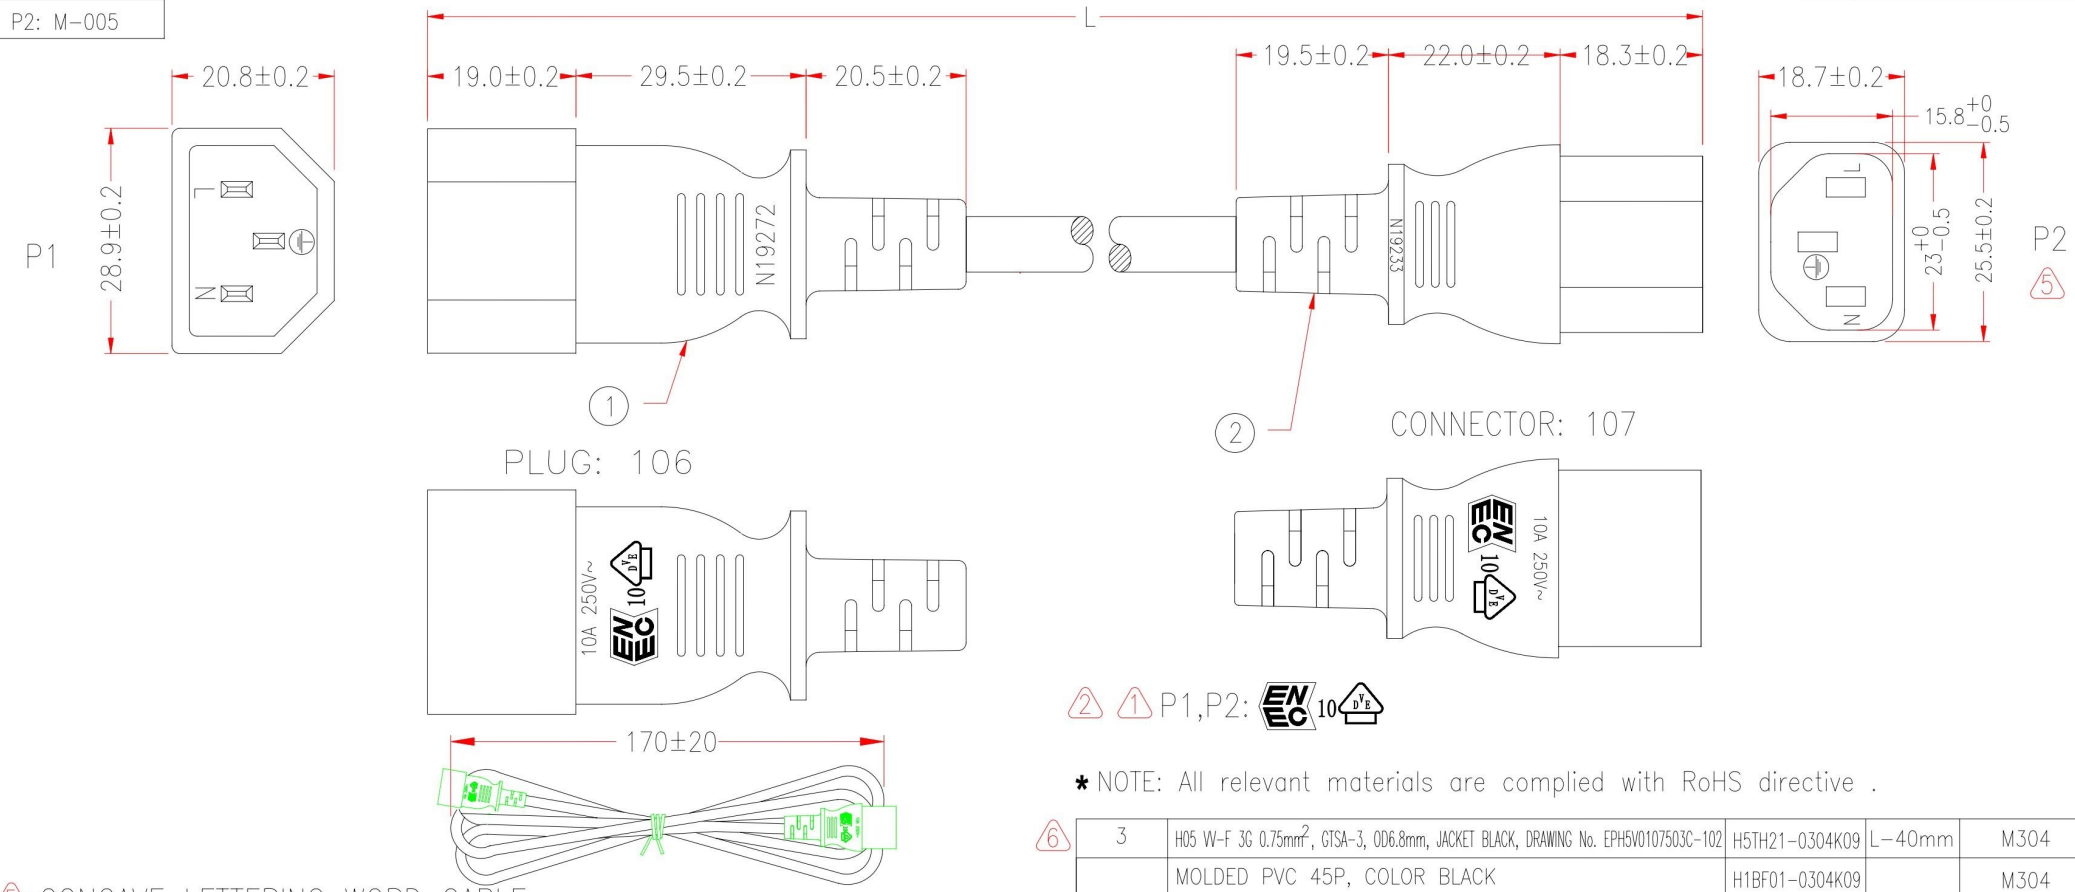

2 1 P1,P2: EN EC 10 DVE

* NOTE: All relevant materials are complied with RoHS directive .

No.	DESCRIPTION		Q'TY	Supplier
6 3	H05 W-F 3G 0.75mm², GTSA-3, OD6.8mm, JACKET BLACK, DRAWING No. EPH5V0107503C-102	H5TH21-0304K09	L-40mm	M304
2	MOLDED PVC 45P, COLOR BLACK	H1BF01-0304K09		M304
	BRACKET: CP-R445A-BS	A1QC61-0767	1	M767
	TERMINAL: 2x4mm 98744BS-0/A	A1QB24-0257	3	M257
1	MOLDED PVC 45P, COLOR BLACK	H1BF01-0304K09		M304
	BRACKET: YS-014	A1QC10-0767	1	M767
	TERMINAL: 2x4mm, 98672BS-1	A1QB07-0257	3	M257

5 CONCAVE LETTERING WORD CABLE:

H05VV-F 3G 0.75mm² D S N FI ÖVE KEMA-KEUR CEBEC IEMMEQU VDE SP

N20050 GTSA-3 3G 0.75mm² MSL CE 4 6

	P1		P2	
BROWN	L	———	L	BROWN
BLUE	N	———	N	BLUE
GREEN/YELLOW	E	———	E	GREEN/YELLOW

6	REV.6 2017.08.09	MODIFY CABLE DRAWING NO.EPH5V0107503C-102 FROM EPH5V0107503C-027
5	REV.5 2017.07.22	MODIFY P2 PLUG MODEL LOGO,CONCAVE LETTERING WORD CABLE.
4	REV.4 2013.03.11	MODIFY CABLE MARKING CONTENT
2	REV.2 2012.07.03	MODIFY P1 MODEL WORD
3	REV.3 2012.09.05	
1	REV.1 2011.03.09	MODIFY P2 MODEL WORD
		CHECKED

PART NO.106107E3FS2B(FP057-02) Revision:

APPROVED			
CHECKED	HU		
DRAWING	LAI		
DATE	09/AUG/17	ITEM NO.	**130256 - 2,0m**

WSS DISTRIBUTION GMBH

Cable Length
Unless Other Spec.
Tolerances:

0 ~200mm	±10mm
201~1000mm	±20mm
1001 ~1500mm	±25mm
1501~2100mm	±30mm
2100mm↑	±40mm

UNIT:mm