
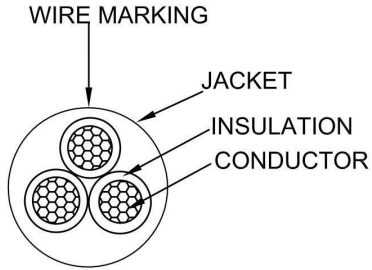
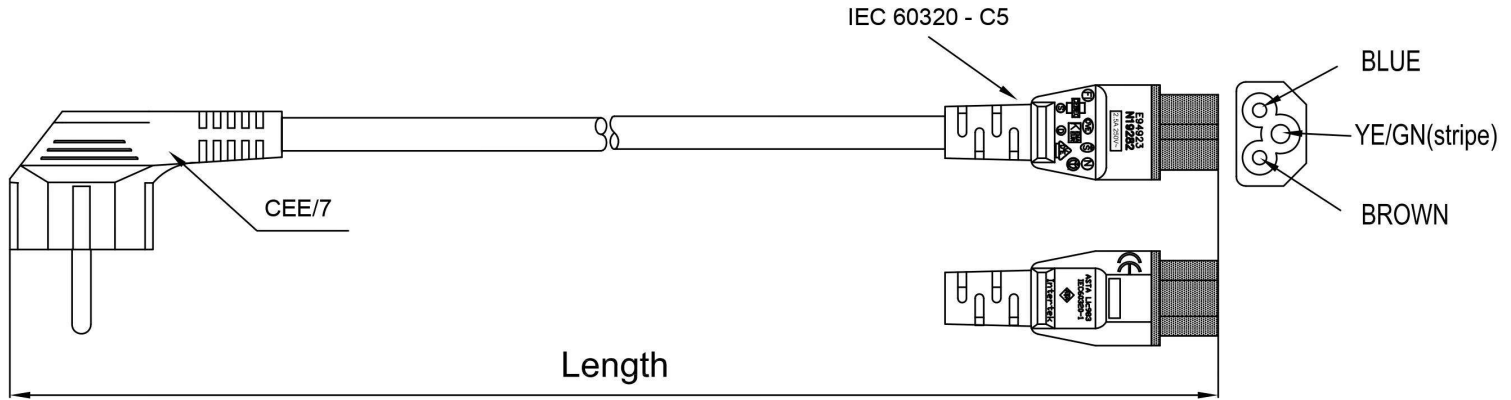


1	2	3	4	5	6	7	8	9	10
CUSTOMER NAME						DATE	REV	DESCRIPTION	BY
CUSTOMER Part No.						2014.03.07	A/0	NEW	Vinci
						2015.08.04	A/1		Maxwell Yuan
						2016.07.26	A/2	CHANGE THE REMARKS	Susam Tang



**REMARKS:**

- 1.PLUG CEE/7 RATED POWER:250V 16A
- 2.CONNECTOR IEC 60320 - C5 RATED POWER:250V 2.5A
- 3.WIRE: H05VV-F 3G0.75MM<sup>2</sup> RATED VOLTAGE:300/500V
- 4.COLOR: BK
- 5.DVW TEST:2000VAC,1S
- 6.POLARIZATION AND CONTINUITY TEST
- 7.CABLES CONFORM TO RoHS

<b>WIRE MARKING:</b> (Hollow) NO.129		+ 0 0 0 0 KEMA-KEUR  CEBC 972 <VDE> NF-USE 1345 IEMMEQU H05VV-F 3G0.75MM <sup>2</sup> V-75 300/500V ORDINARY DUTY NSW17436							
Key Size		3RD			172902 Power cord, CEE7/7 to C5 - 1,8m 172922 Power cord, CEE7/7 to C5 - 3,0m				
Length (mm)	Tolerance								
0-15	±0.05	±0.10	±1.0		Part No.	SF-04+SF-87 H05VV-F 3G0.75MM <sup>2</sup> BK			
15-60	±0.10	±0.20	±1.5		Description	UNIT mm APPROVAL CHECKER DRAWER			
60-150	±0.15	±0.35	±2.0		PAGE	1/1			
150-350	±0.20	±0.50			Draw.No.				
350-1000	±0.40	±0.65							