

1 2 3 4 5 6 7 8 9 10 11 12 13 14

A

B

C

D

E




F

G

H

I

J

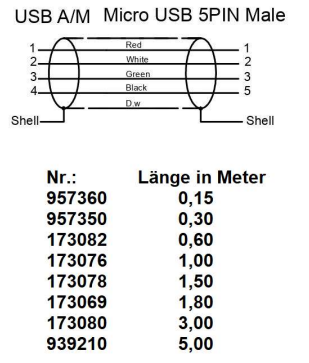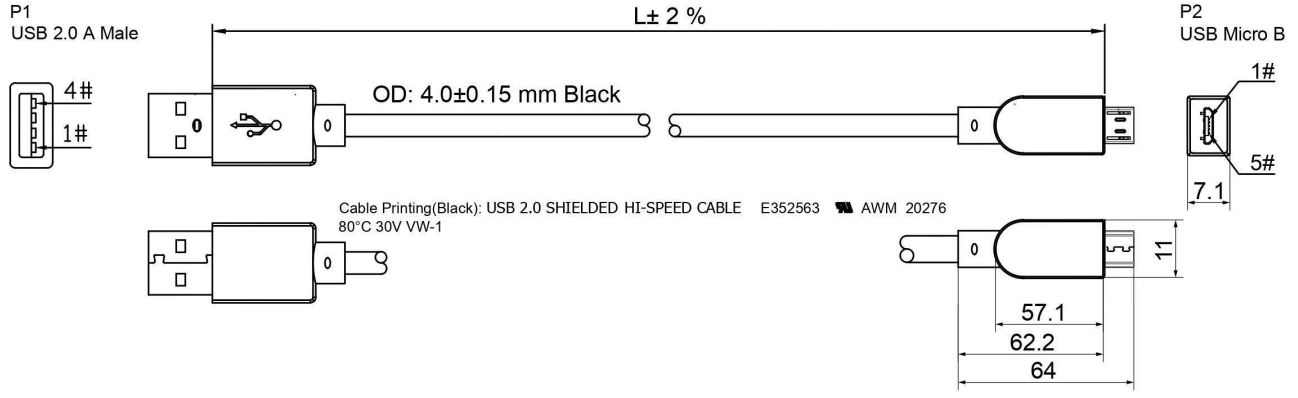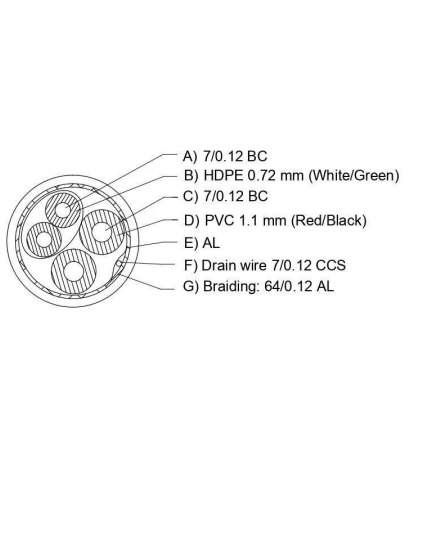

Micro-USB Daten- und Ladekabel

- Verbinder: USB-A Stecker > Micro USB-B St.
- Innenleiter: AWG22/28
- Material: Kabelmantel: PVC
Innenleiter: BC, CCS
Isolierung: PVC, HDPE
Kontakte: vernickelt
Geflecht: AL
- Schirmung: doppelt
- USB Standard: High Speed USB 2.0
- Datenrate: max. 480 Mbit/s
- RoHS-konform

Micro USB data and charging cable

- USB-A male > Micro USB-B female
- Inner conductor: AWG22/28
- Material: Sheath: PVC
Conductors: BC, CCS
Insulation: PVC, HDPE
Contacts: nickel-plated
Braid: AL
- Shielding: double
- USB Standard: High Speed USB 2.0
- Data rate: max. 480 Mbps
- RoHS compliant

Änderungen		Datum	Name	Bezeichnung	Blatt
Datum	Name	gez.:	tf	USB MICRO-B SCHWARZ	von
25.02.2019	tf	gepr.:	tf		
		Norm:			
Änderungen vorbehalten / Subject to change				Zeichnungs-Nr.:	



1 2 3 4 5 6 7 8 9 10 11 12 13 14