



Rohkabel Spezifikation:

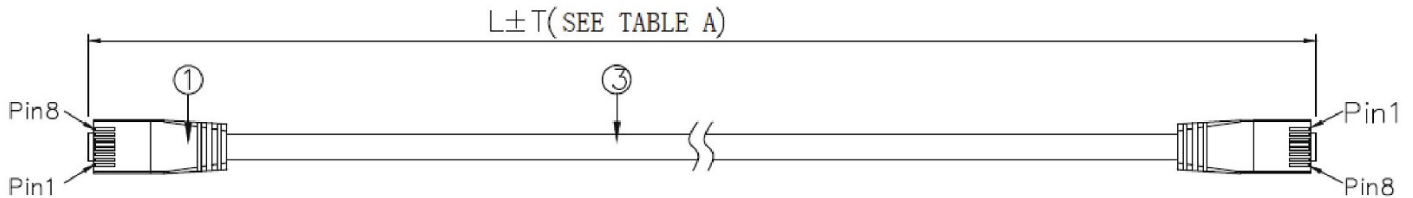

LENGTH (L)		Description	
250 ± 10mm	3000 ± 30mm	Molding material	PVC 60P
500 ± 10mm	5000 ± 50mm	① Plug	RJ45 8P8C golden plated 3u Transparent shielded
1000 ± 10mm		② Molding	MDS
1500 ± 15mm		Conductor	AWG30 7/0.10 BC
2000 ± 20mm		③ Cable	CAT6A U/FTP 7/0.10BC*4P+AL+D(7/0.1BC) PVC OD: 7.0*2.2±0.1mm Printing content: SLIM PATCHCABLE U/FTP CAT.6A ***10GE***

Abmessungen:

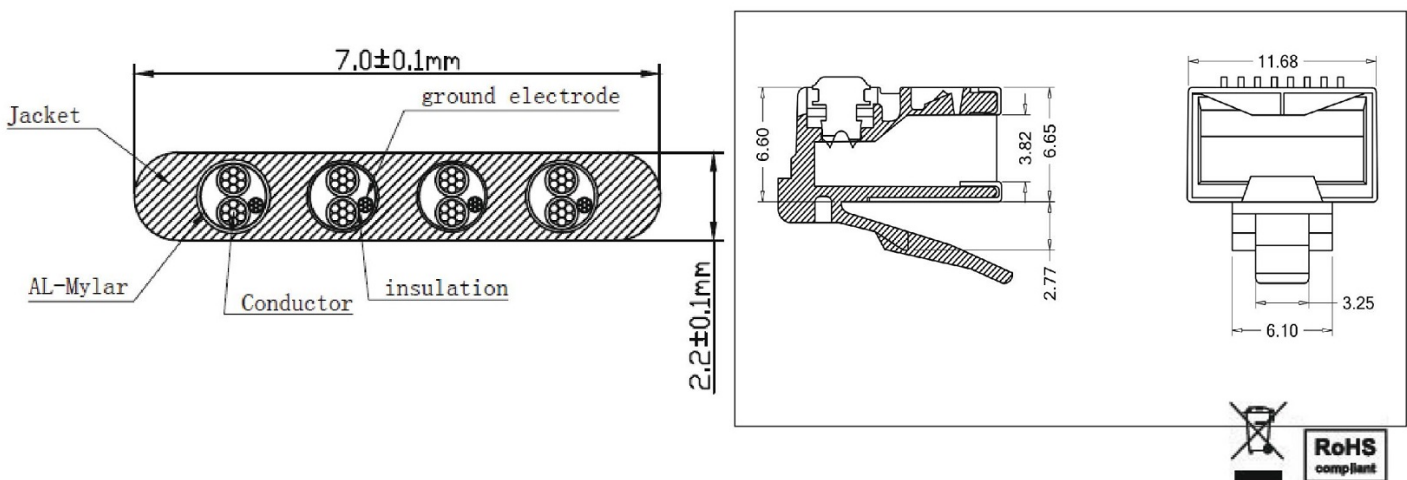

Beschreibung	Cat.6A U/FTP Flachpatchkabel				
Erstellt	Datum	Letzte Revision	Datum	Geprüft	Datum
JB	16.02.2016	BF	15.09.2017	EP	15.09.2017