


P1: M-003  
P2: M-028A

Customer No: No.: 6

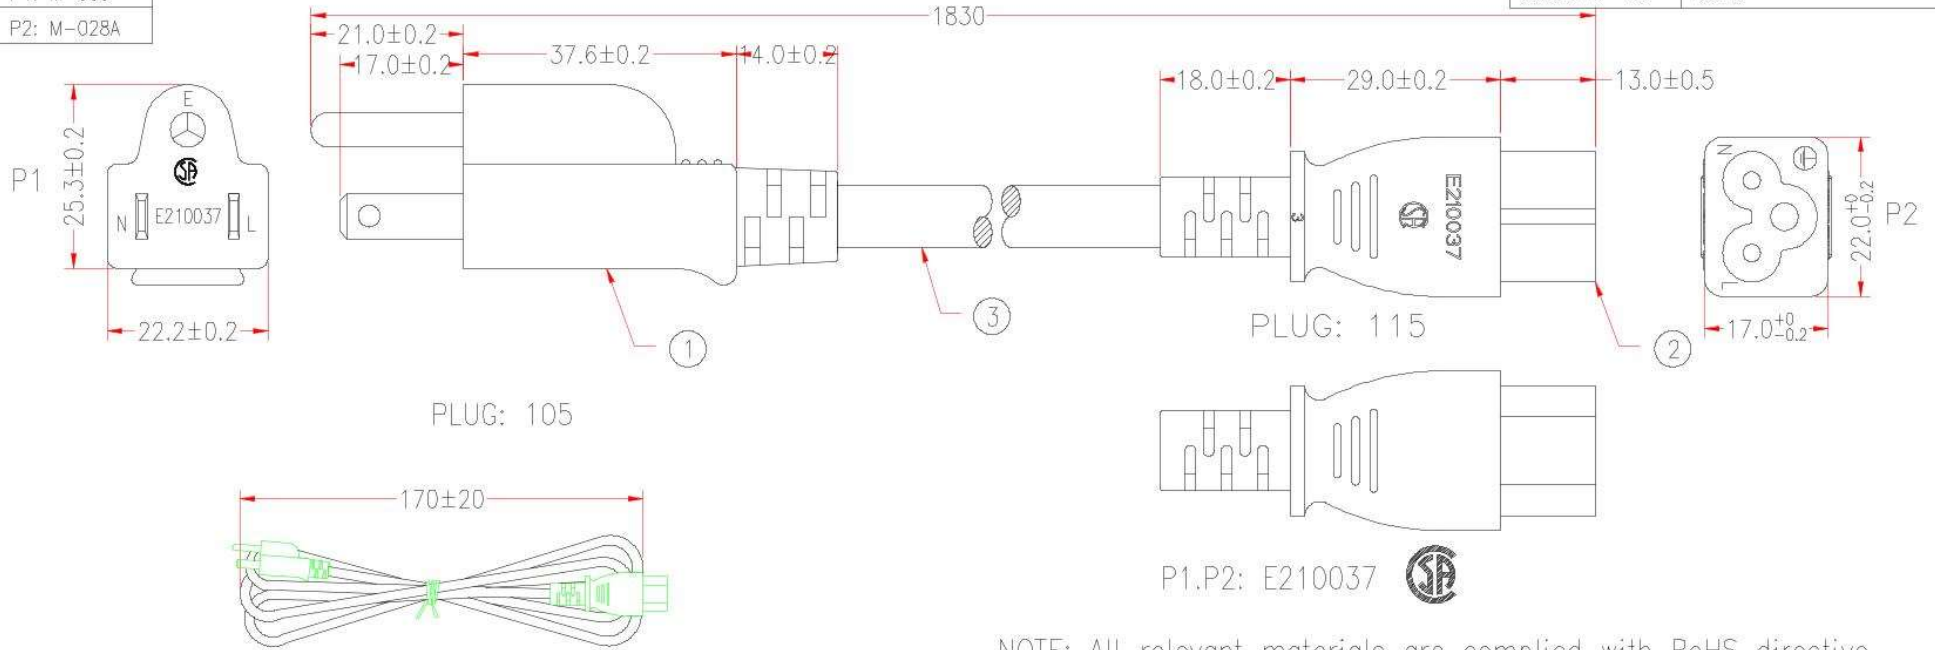

MARKING:

(UL) SVT 3/C 18AWG(0.824MM<sup>2</sup>) VW-1 75°C 300V E204978  
CSA SVT 3/C 0.824MM<sup>2</sup> (18AWG) FT2 60°C 300V LL204790

	P1	P2
BLACK	L	L
WHITE	N	N
GREEN	E	E

NOTE: All relevant materials are complied with RoHS directive .

3	UL SVT 18AWG x 3C, OD 6.3mm, JACKET BLACK, DRAWING No.EPSVT011803C-028	1800mm	M304
2	MOLDED PVC 35P, COLOR BLACK		M304
	BRACKET: HB-011C0416050102	1	M765
	TERMINAL: 98732PS-0	1	M257
1	TERMINAL: 98714PS-0	2	M257
	MOLDED PVC BLACK, 35P		M304
	BRACKET: YS-002	1	M767
	TERMINAL: 98661BS-1	2	M257
	TERMINAL: ø4.75mm SH403	1	M256
No.	DESCRIPTION	Q'TY	Supplier

PART NO. 105115B1F18B		Revision:		Cable Length Unless Other Spec: Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm
APPROVED				
CHECKED	TIAN			
DRAWING	HUANG			
DATE	30/OCT/07	ITEM NO.	<b>555076</b>	UNIT:mm

CHECKED

UNIT:mm