


MARKING: YP-61 YUNG-LI 5/250 BS1363/A 5003 100% APPR. BY ASTA LIC 839 L00244A SASO R304886

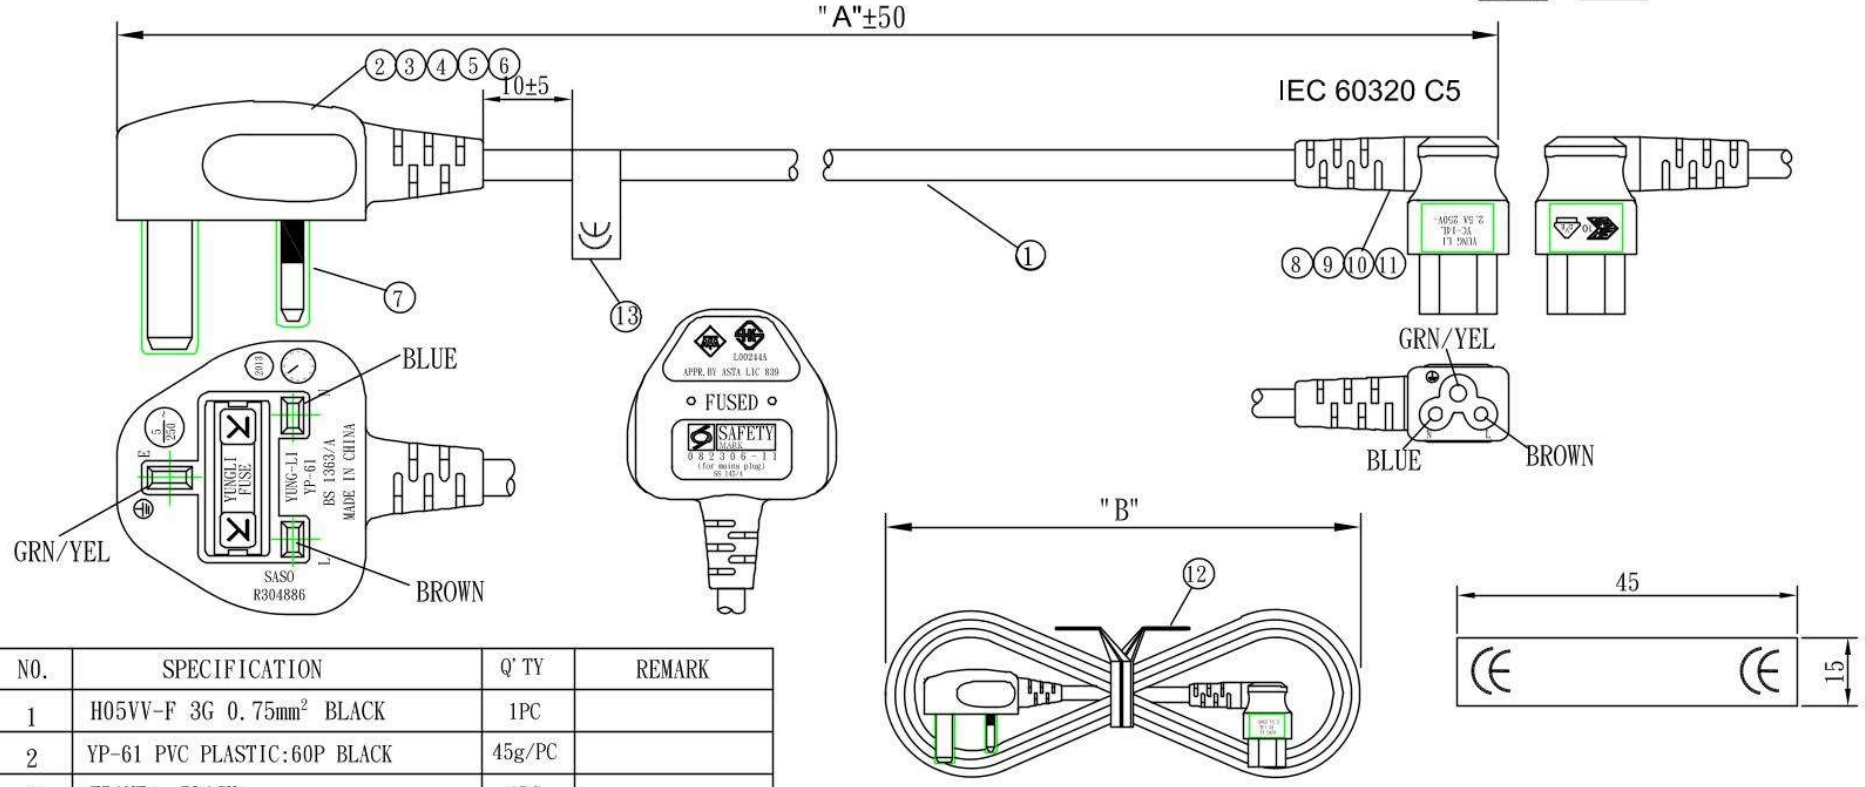

| NO. | SPECIFICATION                        | Q' TY  | REMARK     |
|-----|--------------------------------------|--------|------------|
| 1   | H05VV-F 3G 0.75mm <sup>2</sup> BLACK | 1PC    |            |
| 2   | YP-61 PVC PLASTIC:60P BLACK          | 45g/PC |            |
| 3   | FRAME: BLACK                         | 1PC    |            |
| 4   | FUSE LID                             | 1PC    |            |
| 5   | FRAME LID                            | 1PC    |            |
| 6   | FUSE                                 | 1PC    |            |
| 7   | SLEEVE WHITE                         | 1PC    |            |
| 8   | YC-14L H. S. G                       | 1PC    |            |
| 9   | TER:98732PS-0                        | 1PC    |            |
| 10  | TER:98714PS-0                        | 2PCS   |            |
| 11  | YC-14L PVC PLASTIC:50P BLACK         | 18g/PC |            |
| 12  | MINI TIE:L=150mm BLACK               | 1PC    |            |
| 13  | LABEL:45X15mm                        | 1PC    | Label-4144 |

**Part-no. Item**  
**820005 Power cord, UK / Ireland, type G (BS1363) to C5, Fuse, black - 3m**

|  |             |              |      |          |          |         |      |    |  |
|--|-------------|--------------|------|----------|----------|---------|------|----|--|
| TOLERANCE<br>>0±0.30<br>>1.0±0.50<br>>10.0±1.0<br>>20.0±2.0<br>Angle:<br>±1° | APPROVED    |              | DATE |          |          |         |      |    |  |
|  | CHECKED     |              | DATE |          |          |         |      |    |  |
|  | DRAWN       | SUKI         | DATE | 13.11.25 | CUSTOMER |         |      |    |  |
|  | TYPE        | YP-61/YC-14L |      |          | P/N      | 820005  |      |    |  |
|  | DRAWING NO. |              | REV  | B        | MATERIAL | P. V. C | UNIT | mm |  |