

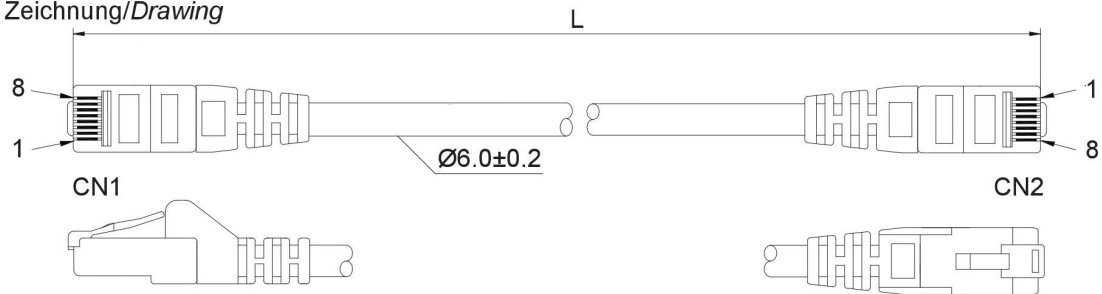





















	1	2	3	4	5	6	7	8	9	10	11	12	13	14			
A	<b>Bild / Figure</b>		<b>Länge / Length (m)</b>		<b>Bild / Figure</b>		<b>Länge / Length (m)</b>		<b>Zeichnung/Drawing</b>								
B			0.25 0.50 1.00 1.50 2.00 3.00 5.00 7.50 10.00				0.25 0.50 1.00 1.50 2.00 3.00 5.00 7.50 10.00										
C			0.25 0.50 1.00 1.50 2.00 3.00 5.00 7.50 10.00				0.25 0.50 1.00 1.50 2.00 3.00 5.00 7.50 10.00		<b>PIN-Belegung/PIN out</b>								
D			0.25 0.50 1.00 1.50 2.00 3.00 5.00 7.50 10.00				0.25 0.50 1.00 1.50 2.00 3.00 5.00 7.50 10.00		<b>CN1</b>			<b>CN2</b>			<b>Querschnitt/Cross section</b>		
E			0.25 0.50 1.00 1.50 2.00 3.00 5.00 7.50 10.00				0.25 0.50 1.00 1.50 2.00 3.00 5.00 7.50 10.00								<b>Cat 6 LC Netzwerkabel</b>		
F			0.25 0.50 1.00 1.50 2.00 3.00 5.00 7.50 10.00				0.25 0.50 1.00 1.50 2.00 3.00 5.00 7.50 10.00		<b>Mechanik</b>			<b>Cat 6 LC Network cable</b>					
G			0.25 0.50 1.00 1.50 2.00 3.00 5.00 7.50 10.00				0.25 0.50 1.00 1.50 2.00 3.00 5.00 7.50 10.00		<ul style="list-style-type: none"> <li>- Anschlüsse: 2x RJ45-Stecker</li> <li>- Kontakte: 8P8C; vergoldet</li> <li>- Knickschutztülle: angespritzt; mit Längenangabe</li> <li>- Innenleiter: 4x2xAWG 27/7 CCA</li> <li>- Isolierung: PVC</li> <li>- Farbkodierung: EIA/TIA 568B</li> <li>- Schirmung: S/FTP (PIMF)</li> </ul>			<ul style="list-style-type: none"> <li>- Connectors: 2x RJ45 plug</li> <li>- Contacts: 8P8C; gold-plated</li> <li>- Strain relief: molded; with length indication</li> <li>- Inner conductor: 4x2xAWG 27/7 CCA</li> <li>- Insulation: PVC</li> <li>- Color coding: EIA/TIA 568B</li> <li>- Shielding: S/FTP (PIMF)</li> </ul>					
H			0.25 0.50 1.00 1.50 2.00 3.00 5.00 7.50 10.00				0.25 0.50 1.00 1.50 2.00 3.00 5.00 7.50 10.00		<b>Leistung</b>			<b>Power</b>					
I			0.25 0.50 1.00 1.50 2.00 3.00 5.00 7.50 10.00				0.25 0.50 1.00 1.50 2.00 3.00 5.00 7.50 10.00		<ul style="list-style-type: none"> <li>- Datenstandard: CAT 6 (250 MHz), IEEE 802.3; 10Base-T; 100Base-T; 1000Base-T</li> </ul>			<ul style="list-style-type: none"> <li>- Data standard: CAT 6 (250 MHz), IEEE 802.3; 10Base-T; 100Base-T; 1000Base-T</li> </ul>					
J			0.25 0.50 1.00 1.50 2.00 3.00 5.00 7.50 10.00				0.25 0.50 1.00 1.50 2.00 3.00 5.00 7.50 10.00		<b>Elektrik</b>			<b>Electrical</b>					
			0.25 0.50 1.00 1.50 2.00 3.00 5.00 7.50 10.00				0.25 0.50 1.00 1.50 2.00 3.00 5.00 7.50 10.00		<ul style="list-style-type: none"> <li>- Isolationswiderstand: DC 300V; 10MΩ</li> <li>- Kontaktwiderstand: max. 3Ω</li> </ul>			<ul style="list-style-type: none"> <li>- Insulation resistance: DC 300V; 10MΩ</li> <li>- Contact resistance: max. 3Ω</li> </ul>					
			0.25 0.50 1.00 1.50 2.00 3.00 5.00 7.50 10.00				0.25 0.50 1.00 1.50 2.00 3.00 5.00 7.50 10.00		<b>Umwelt</b>			<b>Environmental</b>					
			0.25 0.50 1.00 1.50 2.00 3.00 5.00 7.50 10.00				0.25 0.50 1.00 1.50 2.00 3.00 5.00 7.50 10.00		<ul style="list-style-type: none"> <li>- RoHS-konform</li> </ul>			<ul style="list-style-type: none"> <li>- RoHS compliant</li> </ul>					

Änderungen				Datum	Name	Bezeichnung	Blatt
Datum	Name	gez.:	12.01.2014	tf	CAT 6 LC S/FTP PIMF		von
		gepr.:	16.01.2014	tf			
		Norm:					
Änderungen vorbehalten / Subject to change						Zeichnungs-Nr.:	